
Product Data Sheet - Anti-Slip/Step Edge Contrast G8-011

G8-011 Anti-Slip/Step Edge Contrast 37mm

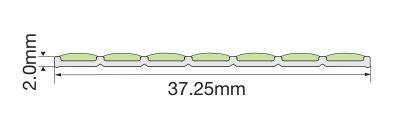

**VISIBLY BETTER** 

The G8-011 Anti-Slip/Step Edge Contrast is designed to ensure visibility of steps in escape routes for compliance with NFPA 101 Life Safety Code (NFPA 101) and International Fire Code (IFC). G8-011 will be effective in all light conditions including during failure of the main lighting.

### COMPLIANCE

2024 V1

Tested to UL 1994 specifications to meet the requirements of NFPA 101 and IFC. This product has also been independently tested for use in Performance Solutions to meet the performance requirements of any performance based building codes.

G8-011 is suitable for indoor use only.

Anti-slip Properties - Meets the performance requirements of UL 410 Standard for Slip Resistance of Floor Surface Materials UV Resistance - Loss of luminance after 1000 hrs ASTM G-155 Cycle 1 exposure: <10% Salt Spray Resistance - ASTM B117: Pass Washability - ASTM D4828: Pass Rate of Burning - ASTM D635: Pass Surface Flammability - ASTM E162: Pass Toxicity - Bombardier Toxic Gas Generation Test SMP800-C: Pass Radioactivity - ASTM D3648: Pass High Temperature Curing: Pass

## SUPPLY

The product is available in 2.45 and 3.06 metre lengths.

### COMPOSITION

Ecoglo G8-011 is manufactured from extruded 6060T5 aluminium section. Custom made photoluminescent pigments and aluminium oxide are embedded in thermoset polyester carriers to integrally bond the active ingredients into the aluminium following curing at high temperature. PL/Anti-Slip is mounded and recessed into channels to create a strong bond.



#### INSTALLATION

Installation needs to be carried out strictly in accordance with the Ecoglo installation instructions.

Consult Installation Instructions on website for full details and surface preparation.

Fixers (screws) must be used if there is any doubt about adhesion.

This product is for indoor use only

**G8-011-2450** For polyurethane adhesive fixing **G8-011-3060** For polyurethane adhesive fixing

# Contact

# Ecoglo Fire Protection Product Trading

Address: 36-C Gloria Street, Barangay San Carlos, Binangonan Rizal 1940, Philippines Office: +632-8802-4760 **Cell:** +63917-514-6803 +63968-356-4773 Email: keith.phillips@ecoglo.com

Web: www.ecoglo.ph www.EcogloAsia.com www.EcogloVenues.com