
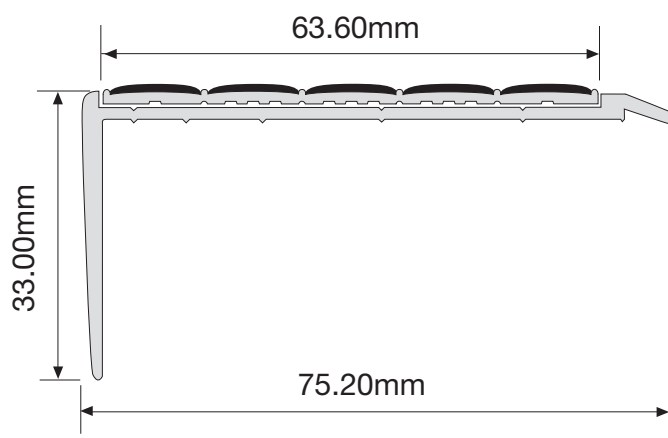


Product Data Sheet - Step Nosing F15-170

2023 V2

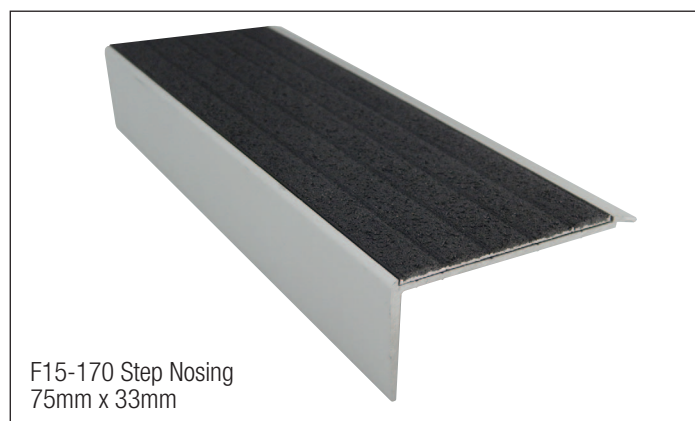

The F15-170 Step Nosing is designed to both define the step edge and help prevent slips and falls in all weather conditions.

COMPLIANCE

The Step Nosing is suitable for use indoors and outdoors. The anti-slip material provides all weather protection from slips and falls.

Anti-slip Properties – UL410 Standard for Slip Resistance for Floor Surface Materials

AS/NZS 4586-2004 Classification: Dry: F Wet: V Ramp: R12

AS 4586-2013 Classification: P5

Salt Spray Resistance – ASTM B117: Pass

Washability – ASTM D4828: Pass

Rate of Burning – ASTM D635: Pass

Surface Flammability - ASTM E162: Pass

Toxicity - Bombardier Toxic Gas Generation Test SMP800-C: Pass

Radioactivity – ASTM D3648: Pass

SUPPLY

The product is available in 100mm increments from 800mm to 1500mm. Custom lengths can also be fabricated on site from 2.45 metre and 3.06 metre lengths.

COMPOSITION

The F15-170 Step Nosing profile consists of 6060T5 aluminium extrusion, anodized (natural/silver colour) to 20 microns thickness.

Ecoglo N15-070 Step Edge Contrast is adhesively fixed into the extrusion. The insert is manufactured from extruded 6063T5 aluminium section. Silicon Carbide anti-slip materials are embedded in thermoset polyester carriers to integrally bond the active ingredients into the aluminium following curing at high temperature.



INSTALLATION

The F15-170 Step Nosing is installed with hidden fixers and can be used on a range of substrates including concrete, timber, tiles, vinyl, steel and checker plate. Uni clamp assemblies can be used for installation onto steel mesh steps.

Maximum recommended length for outdoor installation is 1500mm.

Installation is a two-step process and needs to be carried out strictly in accordance with the Ecoglo installation instructions.

Consult Installation Instructions on website for full details and surface preparation.

| PRODUCT CODE | PRODUCT DESCRIPTION | PRODUCT LENGTH |
|--------------|-------------------------|----------------|
| F15-170-800 | Step Nosing 75mm x 33mm | 800mm |
| F15-170-900 | Step Nosing 75mm x 33mm | 900mm |
| F15-170-1000 | Step Nosing 75mm x 33mm | 1000mm |
| F15-170-1100 | Step Nosing 75mm x 33mm | 1100mm |
| F15-170-1200 | Step Nosing 75mm x 33mm | 1200mm |
| F15-170-1300 | Step Nosing 75mm x 33mm | 1300mm |
| F15-170-1400 | Step Nosing 75mm x 33mm | 1400mm |
| F15-170-1500 | Step Nosing 75mm x 33mm | 1500mm |

Contact

Ecoglo Fire Protection Product Trading

Address: 36-C Gloria Street, Barangay San Carlos, Binangonan Rizal 1940, Philippines

Office: +632-8802-4760

Cell: +63917-514-6803

+63968-356-4773

Email: keith.phillips@ecoglo.com

Web: www.ecoglo.ph www.EcogloAsia.com www.EcogloVenues.com