Product Data Sheet - Anti-Slip Sheet (Flexible) SPF

2026 V1

tractionpro
STEADY EVERY STEP

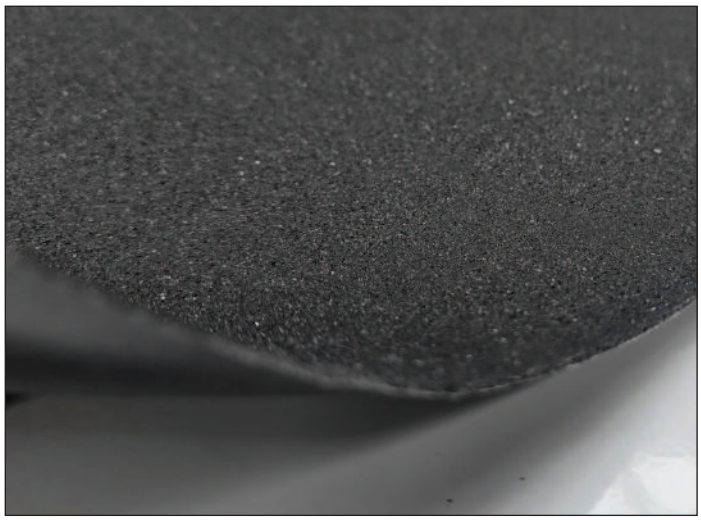

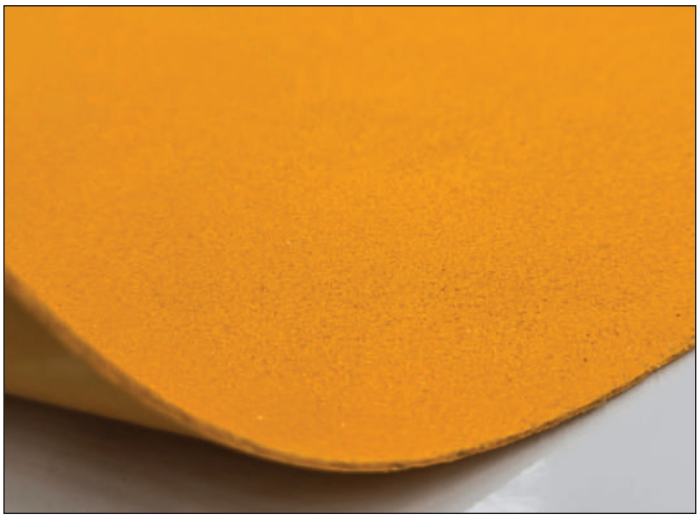

The SPF Anti-Slip Sheet is designed to reduce slips and falls in any weather. It features a peel-and-stick application compatible with most surfaces. Thanks to our high-temperature curing (HTC) manufacturing process, it offers greater durability compared to competitor tape products.

PERFORMANCE

The Anti-Slip Sheet is suitable for use indoors and outdoors providing all weather protection from slips and falls.

Performance Properties –

Slip Resistance – Anticipated to be in line with UL410 and AS/NZS 4856 classifications

Salt Spray Resistance – Anticipated to be in line with ASTM B117

Washability – Anticipated to be in line with ASTM D4828

Rate of Burning – ASTM D635: Pass

Toxicity – Anticipated to be in line with Bombardier Toxic Gas Generation Test SMP800-C

Radioactivity – Anticipated to be in line with ASTM D3648

Peel Adhesion: GB/T 2792-1998: > 18 N/25mm

Independent testing is scheduled. Results are expected to align with previous Ecoglo product performance.

SUPPLY

The product is manufactured in the sizes and colours listed in the following table and is available in packs of 5 pieces.

PRODUCT CODE	PRODUCT DESCRIPTION	SIZE
SPF-070-914152	Anti-Slip Sheet BLACK	914mm x 152mm (36" x 6")
SPF-070-610152	Anti-Slip Sheet BLACK	610mm x 152mm (24" x 6")
SPF-070-305152	Anti-Slip Sheet BLACK	305mm x 152mm (12" x 6")
SPF-080-914152	Anti-Slip Sheet YELLOW	914mm x 152mm (36" x 6")
SPF-080-610152	Anti-Slip Sheet YELLOW	610mm x 152mm (24" x 6")
SPF-080-305152	Anti-Slip Sheet YELLOW	305mm x 152mm (12" x 6")

Custom sizes and colours are available on request

COMPOSITION

TractionPro SPF Anti-Slip Sheet comprises silicon carbide anti-slip materials embedded in a polymer carrier following curing at high temperature.

HTC
HIGH TEMPERATURE CURING

INSTALLATION

SPF Anti-Slip Sheet is provided with pre-fitted release tape.
Indoors, the Anti-slip Sheet can be surface mounted on all smooth surfaces.
Outdoors, the Anti-Slip Sheet can be surface mounted onto smooth concrete.

Installation needs to be carried out strictly in accordance with the TractionPro installation instructions.

Consult Installation Instructions on website for full details and surface preparation.

WARRANTY

2 years indoors (suitable for indoor use only)

TractionPro
Manufactured by Ecoglo International Ltd.
Christchurch, New Zealand.
Phone: (Australia) 1300 406 741
(New Zealand) 03 348 3781
www.tractionpro.net
www.ecoglo.com